
S 1 0 Ш



300 0.70

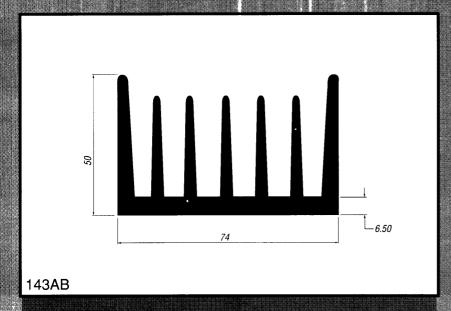


	Typical Performar			ice °k/w Black		
	Length	50	100	150	200	30
	°k/w	2.00	1.35	1.00	0.80	0.7
2.5	`					
20	٠,					
K/W ^{2.0}		77				
1.5				Nati	ural Fir	nish

30		
	70 ctrs	7
	80	
145 A B		

Γ	Typical Performance °k/w Black					
L	.ength	50	100	150	200	300
٥	k/w	2.40	1.80	1.40	1.25	1.15

Black Anodised

0.5



Typical Performance

50

Length

K/W

ļ	96	M5 Bolt Slot
40		
M5 Bolt Slot	47 6 80 M4 Bolt Slot	M5 Bolt Slot

	°k/w	2.00	1.35	1.10	0.87	0.80
.5						
	1	1				
.0						
6				Natu	ıral Fin	ish
.0						

Black Anodised

100

150

°k/w Black 200 300

ABL HEAT SINK DIVISION . BREARLEY STREET . BIRMINGHAM . B19 3XJ

Tel: 021-359 6380 Fax: 021-359 1103